



GENERAL INFORMATION SELECTOR CHART

Series	Series Types	Enclosure	Contacts		Nominal Coil Voltage or Current	Operating Power at P.I. (mW)	Applicable Specification Approvals			
			Arrangement	Rating			MILITARY		CECC	
							Mil-PRF-39016/	Mil-PRF-28776/	16101-	16207-
MA	MA	TO-5	DPDT	1A / 28 Vdc	5...30,0 Vdc	130	9			
	MA-D				5...26,5 Vdc		15			
	MA-DD						20			
	MA-T							1		
MA2		TO-5	DPDT	1A / 28 Vdc	5...30,0 Vdc	130			003	
MCA		TO-5	DPDT	2A / 28 Vdc	5...26,5 Vdc	150				
MS	MS	TO-5	DPDT	1A / 28 Vdc	5...48,0 Vdc	60	11			
	MS-D						16			
	MS-DD						21			
	MS-T							3		
MS2		TO-5	DPDT	1A / 28 Vdc	5...48,0 Vdc	60			004	
1MA	1MA	TO-5	SPDT	1A / 28 Vdc	5...26,5 Vdc	100	7			
	1MA-D						23			
	1MA-DD						24			
	1MA-T							5		
1MA1		TO-5	SPDT	1A / 28 Vdc	5...26,5 Vdc	100			005	
1MS	1MS	TO-5	SPDT	1A / 28 Vdc	5...40,0 Vdc	50	10			
	1MS-D						25			
	1MS-DD						40			
	1MS-T						50		4	
1MS1		TO-5	SPDT	1A / 28 Vdc	5...40,0 Vdc	50			006	
	MGA	CUBIC .100GRID	DPDT	1A / 28 Vdc	5...26,5 Vdc	130	17			
	MGA-D						18			
MGA-DD	150									
MGAE	MGAE	CUBIC .100GRID	DPDT	1A / 28 Vdc	5...28,0 Vdc	130				801
	MGAE-D									
	MGAE-DD						150			
MGA2	MGA2/D2	CUBIC	DPDT	1A / 28 Vdc	5...28,0 Vdc	140			007	
MGS	MGS	CUBIC .100GRID	DPDT	1A / 28 Vdc	5...48,0 Vdc	60	41			
	MGS-D						42			
	MGS-DD						43			
MGSE	MGSE	CUBIC .100GRID	DPDT	1A / 28 Vdc	5...48,0 Vdc	60				802
	MGSE-D									
	MGSE-DD									
MGS2	MGS2/D2	CUBIC	DPDT	1A / 28 Vdc	5...48,0 Vdc	60			008	
12K		1/2 CC	DPDT	2A / 28 Vdc	5...26,5 Vdc	250	6			
2K		1/2 CC	DPDT	2A / 28 Vdc	5...48,0 Vdc	250				
2K6600		1/2 CC	DPDT	2A / 28 Vdc	5...48,0 Vdc	250			007.014.021	
							MILITARY Compliance			
							Mil-R-39016/	Mil-R-5757/		
2K7940		1/2 CC	DPDT	2A / 28 Vdc	6...26,5 Vdc	250	22			
KA	2KA	1/2 CC	DPDT	2A / 28 Vdc	5...48,0 Vdc	100				
HA	2HA	1/2 CC	DPDT	5A / 28 Vdc	5...48,0 Vdc	300				
B	2B	CC	DPDT	2A / 28 Vdc	6...76,0 Vdc	250				
	2BR		DPDT	26,5...115 Vac	370					
2B6660		CC	DPDT	3A / 28 Vdc	6...76,0 Vdc	250			008	
2B7506		CC	DPDT	2A / 28 Vdc	6...26,5 Vdc	250		10		
	BS		DPDT	2A / 28 Vdc	6...26,5 Vdc	100				
BS	2BSA	CC	SPDT		3,2...70,6mA	25				
	1BSK		DPDT		4,0...89,2mA	40				
	2BSK		DPDT							
BN	1BN	CC	SPDT	5A / 28 Vdc	6...76,0 Vdc	280				
	2BN		DPDT							
2BC7201		CC	DPDT	2A / 28 Vdc	4,0...90,0mA	40		13		
BCN	1BCN	CC	SPDT	5A / 28 Vdc	6...40,0 Vdc	80				
	2BCN		DPDT							
4B			4PDT	2A / 28 Vdc	6...115 Vdc	400				
T	2T	CC	DPDT	10A / 28 Vdc	6...115 Vdc	500				
	2TR				115 Vac					
TN	2TN	CC	DPDT	15A / 28 Vdc	6...115 Vdc	500				
	2TNR				115 Vac					
2T7188		CC	DPDT	10A / 28 Vdc	6...120 Vdc	500		23		
RFK	RFK	1/2 CC	SPDT	2A / 28 Vdc	6...26,5 Vdc	250				
	2RFK		DPDT							
RFB	RFB	CC	SPDT	2A / 28 Vdc	6...76,5 Vdc	250				
	2RFB		DPDT							
RFBC	RFBC	CC	SPDT	2A / 28 Vdc	4,0...89,2 mA	40				
	2RFBC		DPDT							
4MA		CC	4PDT	1A / 28 Vdc	5,0...30,0 Vdc	260				
4MS		CC	4PDT	1A / 28 Vdc	5,0...48,0 Vdc	120				



•100 GRID TERMINAL RELAY DPDT

Series
MGA

• Basic • Suppression • Suppression/Steering

Product Description

A series of ultra miniature hermetically sealed relays with .100 inch grid spaced terminations. These relays are similar to MA series TO-5 relays construction.

The following construction features ensure the highest reliability in extreme environments:

- All welded relay construction
- Cleaning and sealing techniques ensures maximum internal cleanliness
- Low level to 1 amp. switching
- 2 form C, DPDT contacts, special metal alloy with gold plating
- SMD terminal style available
- Frame design and force / mass ratio provides exceptional immunity to shock and vibration

Low Intercontact capacitance and contact circuit losses, provides also a reliable switching function in demanding RF applications, combined with small size and low coil power dissipation (see figure 1).

Series Types (note 2)

- MGA* Basic Relay, 2 form C, DPDT
- MGA*D Basic Relay combined with an internal diode for coil transient suppression
- MGA*DD Basic Relay incorporates two internal diodes for coil transient suppression and polarity reversal protection

Environmental and Physical Specifications

Temperature (Ambient)	-65°C to +125°C
Shock	75 g's, 6 msec.
Vibration (sinusoidal)	30 g's, 10 to 3000 Hz
Vibration (random)	0,4g ² /s/Hz, 50 to 2000 Hz
Acceleration	50 g's
Sealing	All welded, Hermetic
Weight	0.09 oz. (2.55 grams) max.


MIL-PRF-39016/17, 18 & 19



Electrical Characteristics (over the Temperature range, unless otherwise noted)

Coil Data	See Typical Characteristics table		
Contact Rating (Note: All ratings with grounded case)	Type Load		Contact Load
	Low Level	10 to 50 μ A / 10 to 50 mV	
	Resistive	1 Amp / 28 V dc	
		250 mA / 115 Vac, 60 and 400 Hz (case not grounded)	
		100 mA / 115 Vac, 60 and 400 Hz	
Resistive overload	2 Amp / 28 V dc		
Inductive	200 mA / 28 V dc (320 mH)		
Lamp	100 mA / 28 Vdc		
Cycles min.			
Contact Resistance	0,1 ohm max. initial, 0,2 ohm max after life		
Operate Time	2,0 msec. max.		
Release Time	1,5 msec. max. Series: MGA*	4,0 msec. max. Series: MGA*D, MGA*DD	
Contact Bounce	1.5 msec. max.		
Contact stabilisation Time	2,5 msec max		
Dielectric Strength	500 Vrms min., 60 Hz, all points at sea level	125 Vrms min., 60 Hz, all points at 70.000 ft.	
Insulation Resistance	10.000 megohms min. all points at 500 Vdc		
Intercontact Capacitance	0,4 pF typical		
Sensitivity	130 milliwatts at pick-up, 500 milliwatts at nominal rated coil voltage at 25 °C		
Diode P.I.V.	100 Vdc min. Series : MGA*D, MGA*DD		
Negative Coil Transient	1,0 Vdc max. Series: MGA*D, MGA*DD		

Figure 1 - Radio Frequency Curves

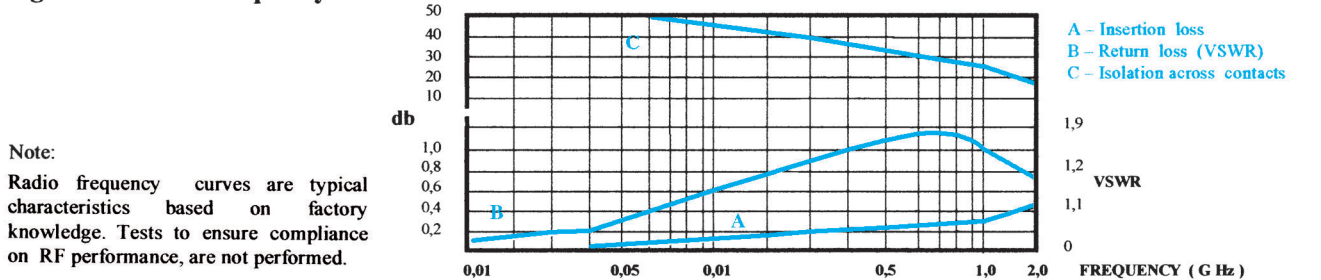



•100 GRID TERMINAL RELAY DPDT


Series
MGA

• Basic • Suppression • Suppression/Steering

Typical Characteristics (over the Temperature range, unless otherwise noted)

Coil Voltage Code	Series Types	Coil Voltage V dc		Coil Resistance ohms at 25 °C ±10 %	Coil Current mA, at 25°C		Pick-up Voltage V dc Max.	Drop-out Voltage V dc	
		Rated	Max.		Min.	Max.		Max.	Min.
5	MGA*, MGA*D	5,0	5,8	50	-	-	3,5	2,3	0,14
	MGA*DD			39	93,2	128,2		4,0	2,8
6	MGA*, MGA*D	6,0	8,0	98	-	-	4,5	3,2	0,18
	MGA*DD			78	58,3	78,3		5,0	3,4
9	MGA*, MGA*D	9,0	12,0	220	-	-	6,8	4,9	0,35
	MGA*DD			33,0	42,9	42,9		7,8	5,3
12	MGA*, MGA*D	12,0	16,0	390	-	-	9,0	6,5	0,41
	MGA*DD			25,6	32,8	32,8		10,0	0,9
18	MGA*, MGA*D	18,0	24,0	880	-	-	13,5	10,0	0,59
	MGA*DD			17,5	22,1	22,1		14,5	1,1
26	MGA*, MGA*D	26,5	32,0	1560	-	-	18,0	13,0	0,89
	MGA*DD			14,8	18,5	18,5		19,0	1,4


Outline Dimensions

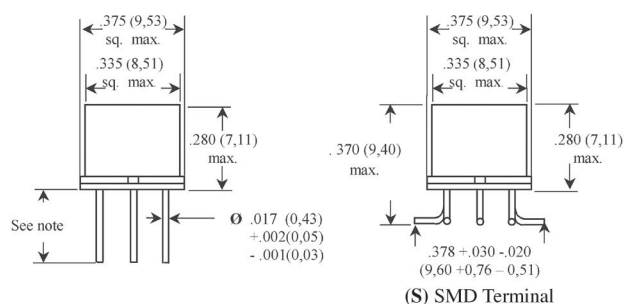

Note:

- Dimensions are shown in inches (millimetres)
- Terminal Variants: - (C) Wire Terminal = .500 (12,7) min.
- (P) Pin Terminal = .187 ± .01 (4,75 ± 0,25)


Terminal Locations

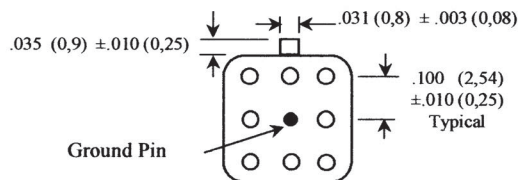

Note :

- Viewed from terminals
- Ground pin is optional
- Dimensions are shown in inches (millimetres)

Schematic Diagrams

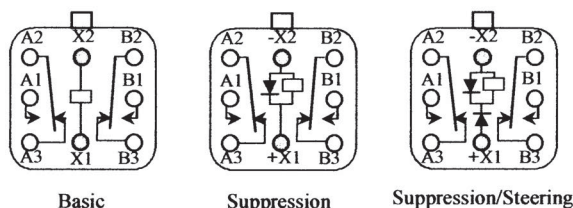


Note:

Schematics are viewed from terminals, numbers are for references only

Mounting Pad

Relays can be supplied with a mounting pad epoxied to the relay header, to prevent the possible shorting of printed circuit board land lines and to facilitate circuit board cleaning. To order relay with pad add. W to part Number. Example : MGACD-26 W

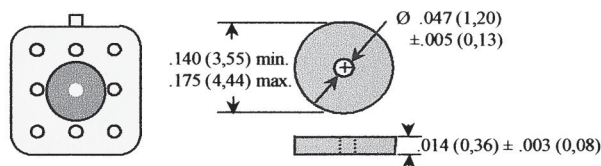

Note : Dimensions are in inches (millimetres)

Note:

1 For qualified relays add. " I " and the applicable suffix for Failure Rate designation.
Example: IMGACD - 26A

2 " * " Indicates Terminal Variants: C, P or S

3 Failure Rate (Reliability Level)

Military Suffix	NHIG Suffix	F R %/10.000 cycles
L	A	3,0
M	B	1,0

How to Order. (note 1) (Part Numbering System)

